

Doc 06184S00

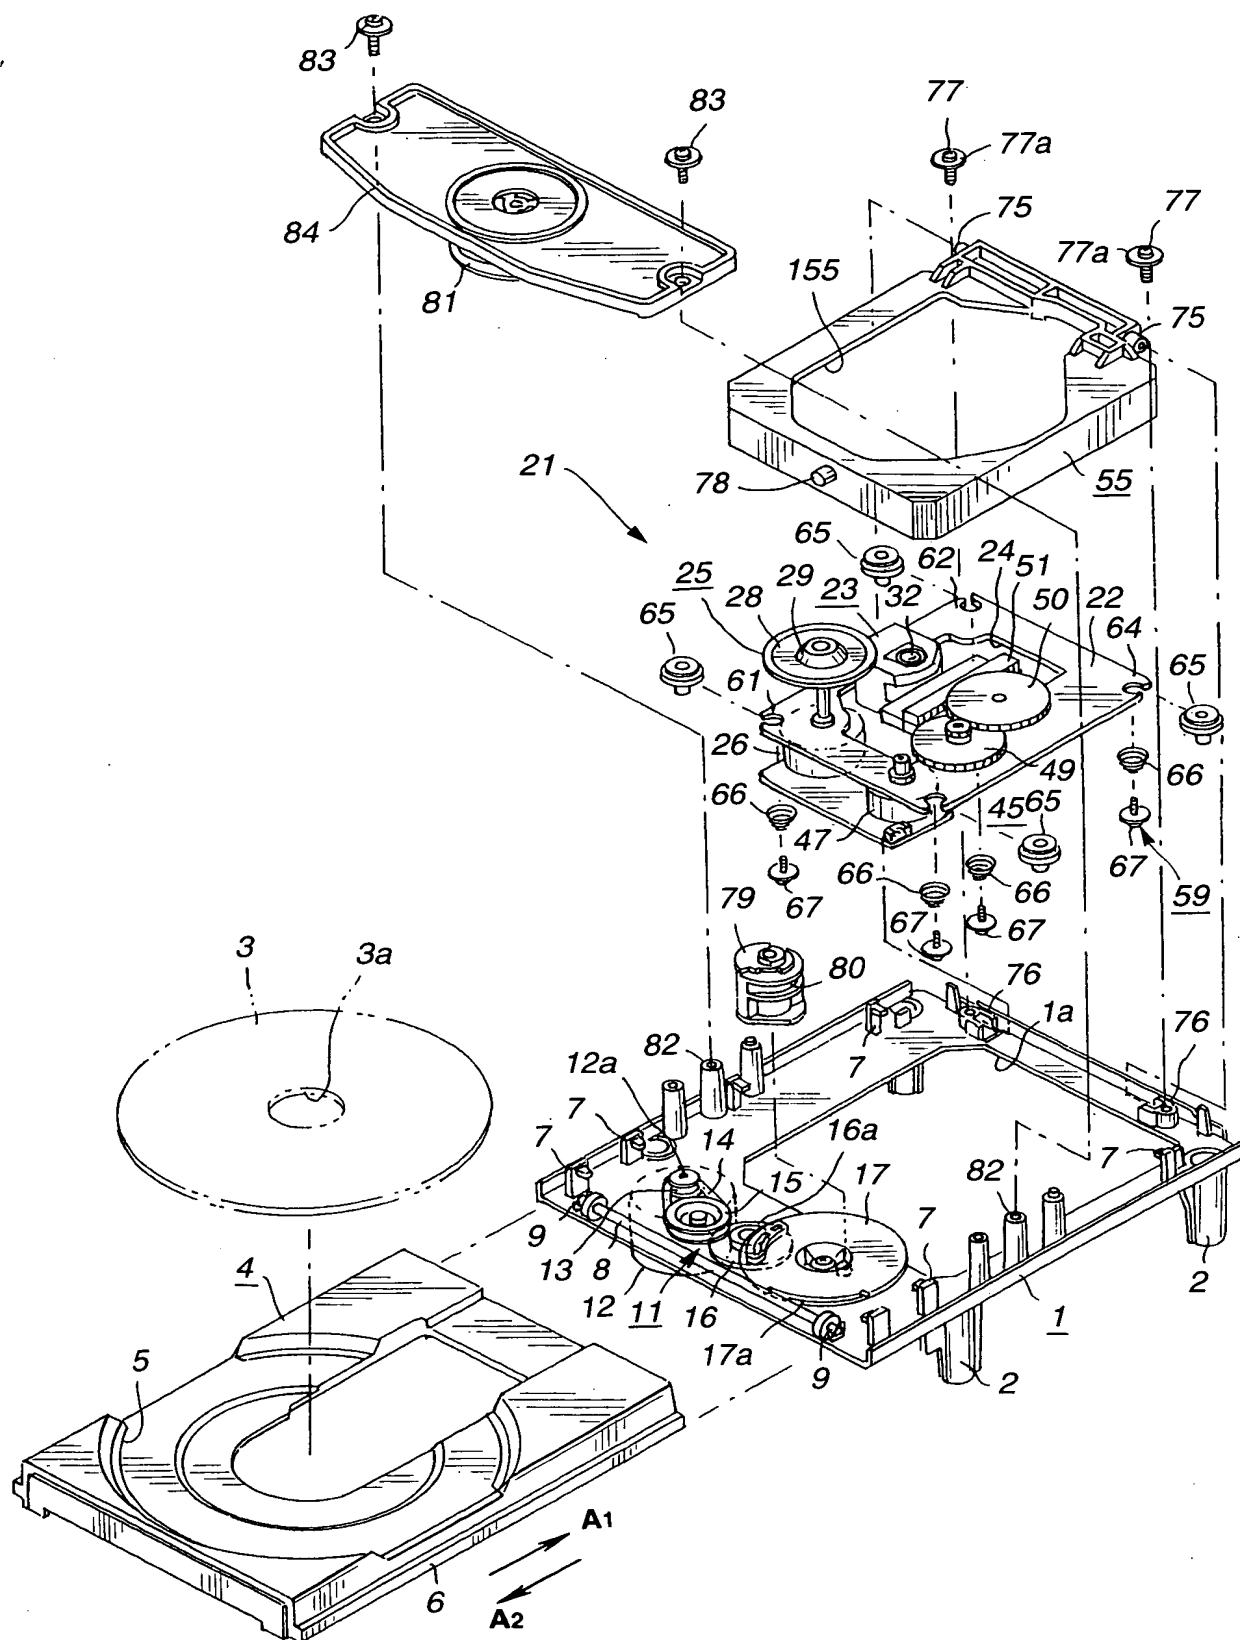


FIG.1

Technical drawing of a mechanical assembly, likely a pump or motor, showing a cross-sectional view of the internal components. The drawing includes a central shaft (11) with a rotor (12) and a stator (13). The rotor is connected to a drive shaft (14) which is supported by bearings (15, 16). The stator is connected to a drive shaft (17) which is supported by bearings (18, 19). The entire assembly is housed in a casing (20) with a flange (21). Various other components are labeled with numbers 1 through 37.



001090 02858560

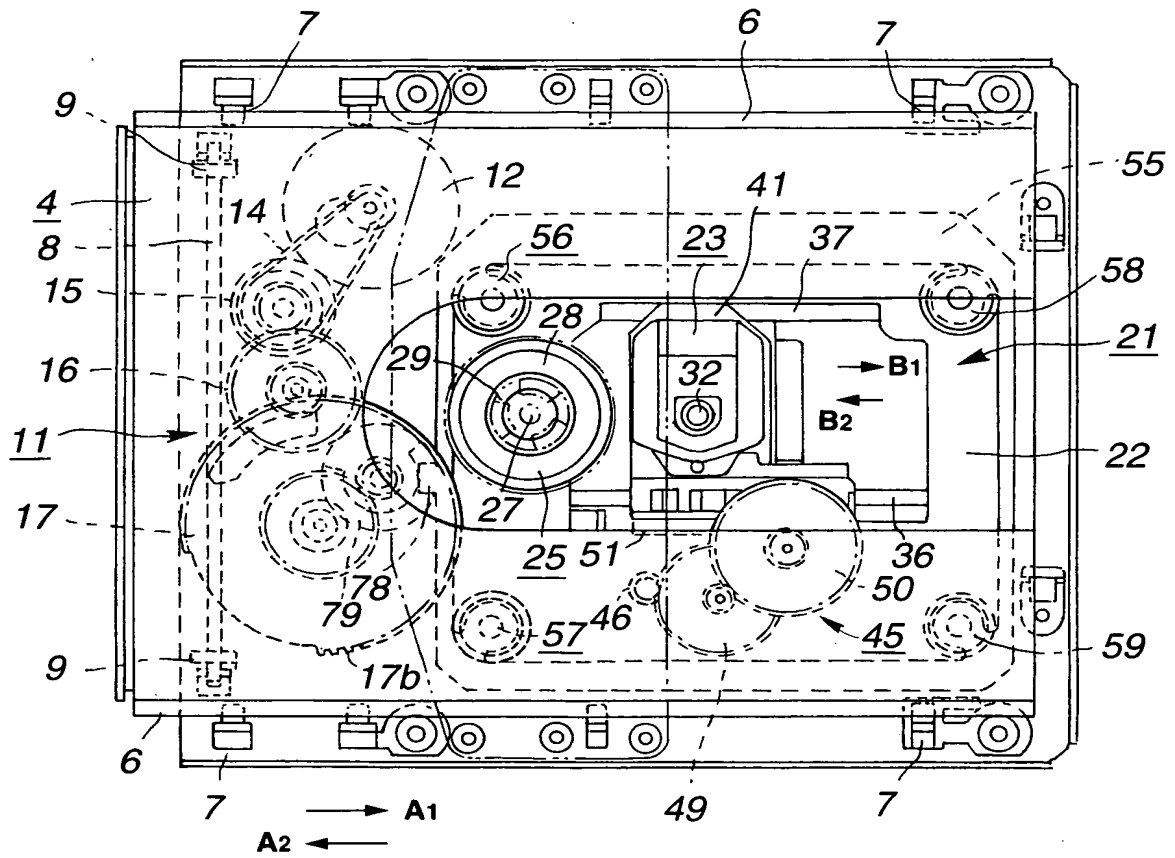


FIG.3

001090 02858560

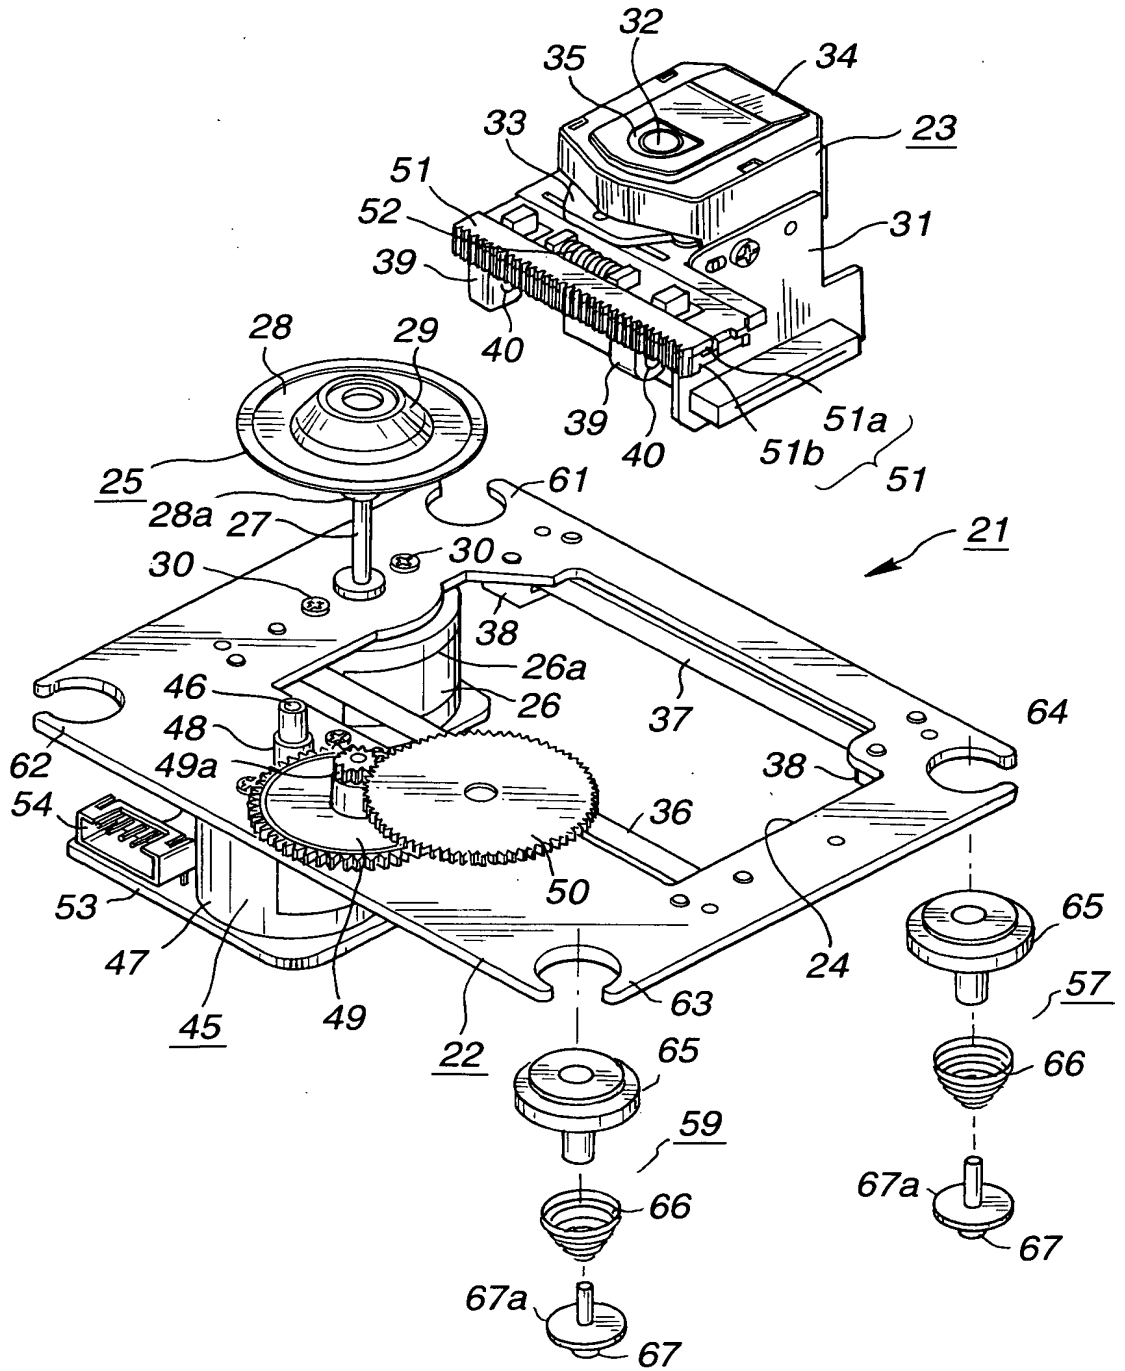
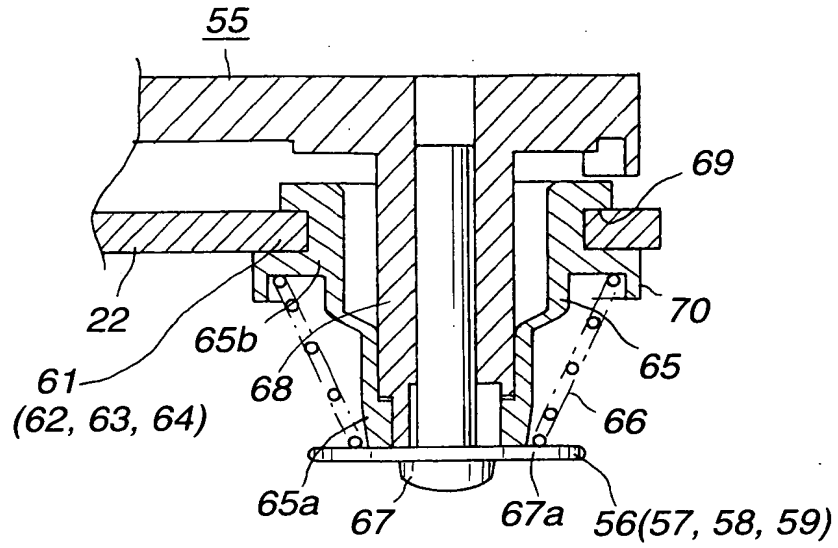
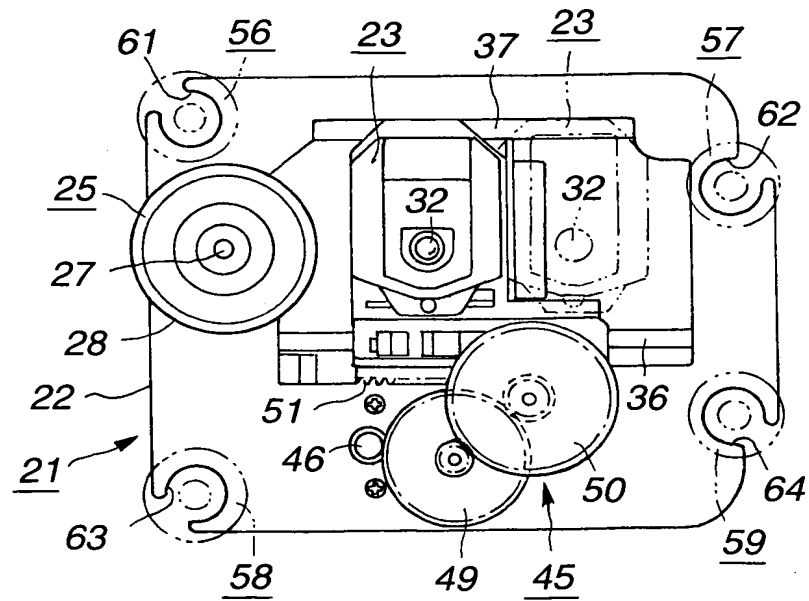


FIG.4

**FIG.6**



**FIG.7**

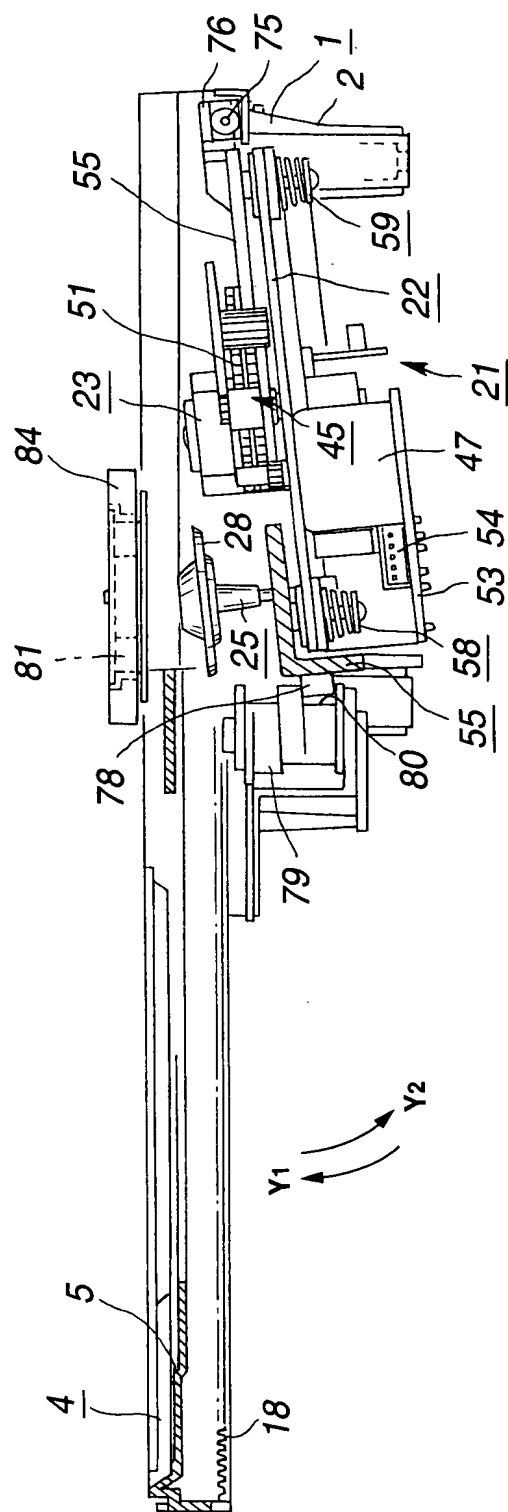


**FIG.8**

This cross-sectional view shows a mechanical assembly. A central vertical component, labeled 55, is positioned within a housing. To the left of the central component, there is a component labeled 61, which is further identified by the group (62, 63, 64). Below this, a component labeled 71 is shown. To the right of the central component, there is a component labeled 73. At the bottom of the assembly, there is a component labeled 72, with a sub-label 72a. A component labeled 68 is located near the bottom right. A component labeled 22 is shown on the right side. At the very bottom, there is a component labeled 56(57, 58, 59).

**FIG.9**

\_\_\_\_\_



# FIG. 10

09585870.060100

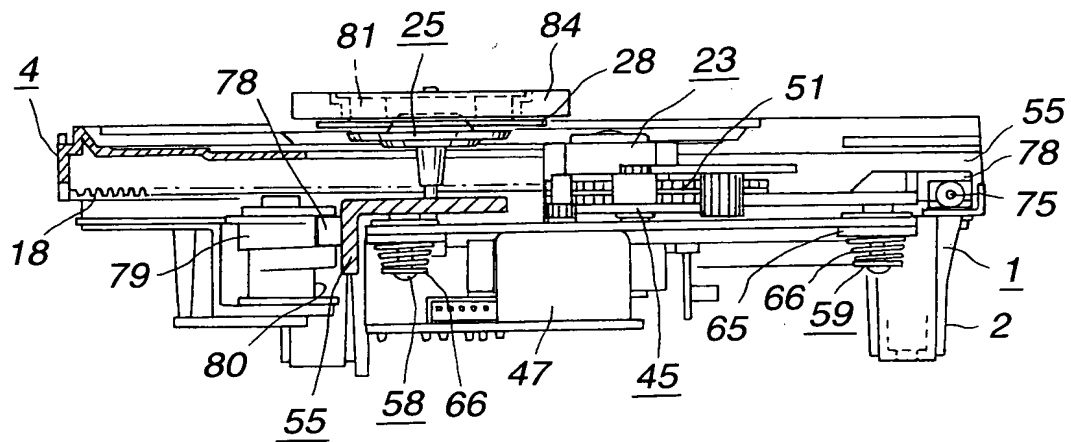


FIG.11